


# bastion



DISPOSABLE GLOVES

Latex High Risk Powder Free Textured

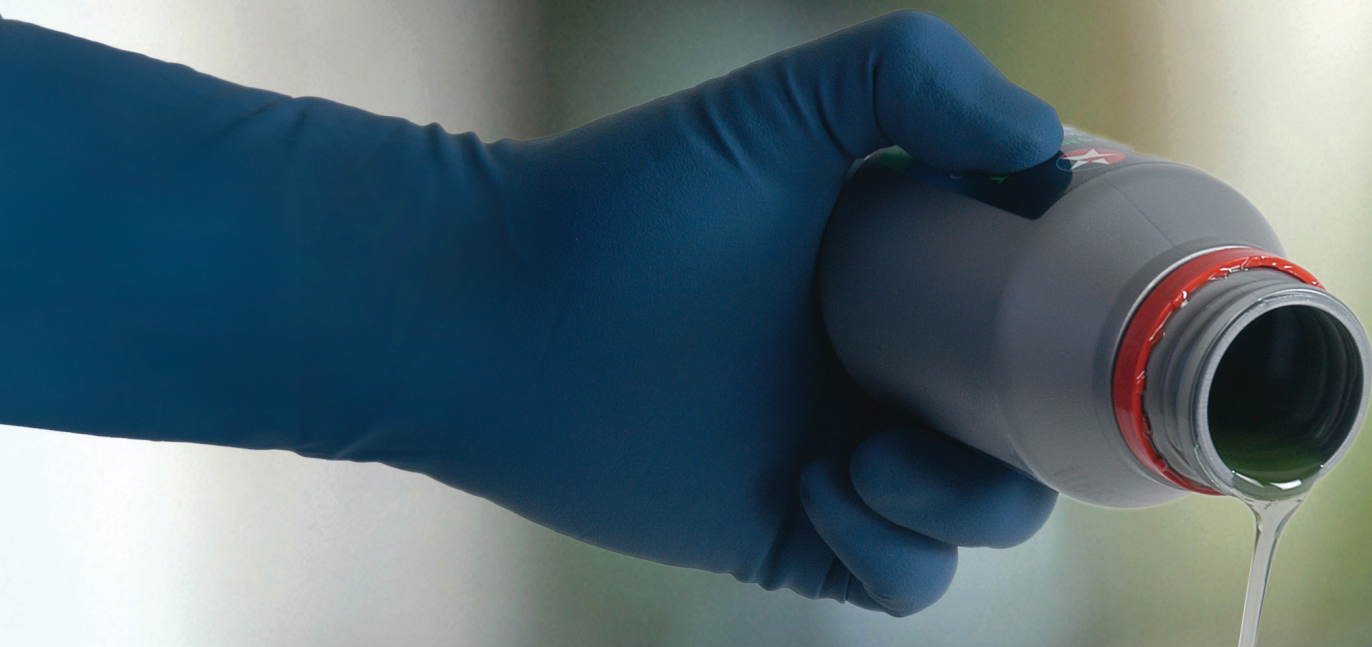

# bastion

Ultimate solutions in barrier protection

T 0800 864 725 F 0800 864 725 E [sales@bastionpacific.co.nz](mailto:sales@bastionpacific.co.nz)  
W [www.bastionpacific.co.nz](http://www.bastionpacific.co.nz)



# Latex High Risk Powder Free Textured

<b>Product:</b>	Latex High Risk Chlorinated Powder Free
<b>Material:</b>	Natural Rubber Latex
<b>Type:</b>	Non Sterile
<b>Design:</b>	Ambidextrous
<b>Feature:</b>	Textured
<b>Cuff:</b>	Beaded
<b>Usage:</b>	Single Use Only
<b>Colour:</b>	Blue
<b>Packaging:</b>	S-XL 50pcs inner, 10 inners/carton XXL 45pcs inner, 10 inners/carton

## Dimensions:

Size	Palm Width (mm)	MGM Length (mm)	ASTM D3578-05 Length (mm)
S	83-88	300	Min. 295
M	93-98	300	Min. 295
L	103-109	300	Min. 295
XL	115-120	300	Min. 295
XXL	122-127	300	Min. 295

## Thickness:

Location of Thickness Measurement	Single Wall (mm)
Finger	0.39
Palm	0.33
Cuff	0.20

## Physical Properties:

	Before Aging	After Aging
Tensile Strength (MPa)	Min. 18	Min. 14
Elongation (%)	Min. 650	Min. 500
Force At Break (N)	Min. 9	Min. 6

<b>Protein Content:</b>	Max. 50µg/dm <sup>2</sup>
<b>Powder Level:</b>	Max. 2.0mg/glove
<b>Compliance Standards:</b>	ASTM D3578-05, EN 455 Part 1,2 & 3: 2000

## Inspection Criteria: (Sampling & Inspection ISO 2859)

	Inspection Level	AQL
Watertight Test	G1	1.5
Major Defects	G1	2.5
Minor Defects	G1	4.0
Dimensions	S2	4.0
Physical Properties	S2	4.0

## Quality Assurance:

ISO 9001: 2000 Certified by SGS (UK) and SIRIM (Malaysia)

ISO 13485: 2003 Certified by SGS (UK)

Directive 89/686/EEC on Personal Protective Equipment Article 11B Certified by SGS (UK)

